

*Remington Arms Company, Inc.*  
870 Remington Drive  
PO Box 700  
Madison, NC 27025-0700  
(336) 548-8700  
800-243-9700

# ***REMINGTON***

## **Arms Company, Inc.**

**MODEL 4  
SINGLE SHOT RIFLE**

- **Shooting Safety Commandments**
- **Information**
- **Instructions for Operation & Care of Rifle**
- **Components Parts Listing**
- **Value and Reference Book Listing**

**NOTE:** We are pleased to accommodate your request for the Model 4 Single Shot Rifle information. The following documentation represents all information available on this model from the Remington Arms Co., Inc.

**DO NOT MAKE CHANGES OR ALTERATIONS TO ANY PARTS OF A FIREARM. USE ONLY REMINGTON PARTS. NEVER MAKE AN ADJUSTMENT TO THE TRIGGER, OR CHANGE THE SHAPE OR SIZE OF THE SEAR, SEAR NOTCH, OR OTHER PARTS.**

# Ten Commandments of Shooting Safety

1. Always keep the muzzle pointed in a safe direction.
2. Firearms should be unloaded when not in use.
3. Don't rely on your gun's "safety".
4. Be sure of your target and what is beyond it.
5. Use correct ammunition.
6. If your gun fails to fire when the trigger is pulled, handle with care!
7. Always wear eye and ear protection when shooting.
8. Be sure the barrel is clear of obstructions before shooting.
9. Do not alter or modify your gun, and have guns serviced regularly.
10. Learn the mechanical and handling characteristics of the firearm you are using.

# Remington

## Single Shot Rifles




No. 6 Take-Down

Made in .33 caliber for .33 Short, .33 Long and .33 Long Rifle R. F. cartridges, and in .33 caliber for .33 Short and .33 Long R.F. cartridges.

Also supplied in smooth bore for Shot Cartridges.

Designed especially to meet the demand for a light weight and reliable "take-down" rifle at a moderate price. Material and workmanship up to the Remington standard.

**SPECIFICATIONS:**—20-inch Remington steel round tapered barrel, accurately bored and rifled; case-hardened frame. Walnut stock and fore-end; finely finished steel butt plate. New design front, rear and tang peep sights. Barrel detached by loosening thumb screw. Length over all, 35 inches. Length taken down, 20 1/2 inches. Weight about 5 1/2 pounds.

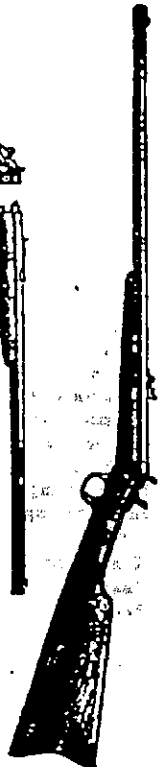

No. 4 Take-Down

Made in .33 caliber for .33 Short, .33 Long and .33 Long Rifle R. F. cartridges; in .38 caliber for .38 Stevens Leamok R. F. cartridge and in .33 caliber for .33 Short and .33 Long R. F. cartridges.

Also supplied in smooth bore for Shot Cartridges.

The features that especially commend this rifle are the simplicity and durability of the action, superior quality of workmanship and material and extreme accuracy.

**SPECIFICATIONS:**—22 1/2-inch Remington steel octagon tapered barrel, carefully bored and rifled; forged case-hardened frame; parts of mechanism forged steel. Walnut stock and fore-end; finely finished steel butt plate. Automatic shell ejector which throws shell from chamber when breech is opened. Length over all, 38 1/2 inches. Length taken down, 22 1/2 inches. Weight about 4 1/2 pounds.



No. 4S "Military Model" Solid Frame

(Formerly called "Boy Scout" Rifle)

Chambered for .33 Short, Long and Long Rifle Cartridges.


An attractive and durable .22 caliber rifle of light weight for the younger generation and grown-ups as well. Its extreme accuracy and splendid handling qualities recommend it particularly for drill and target work. Tip-up feature have caused it to be adopted by a number of leading large military organizations throughout the country.

# Remington



## Single Shot Rifles

### COMPONENT PARTS

#### NO. 4 RIFLE

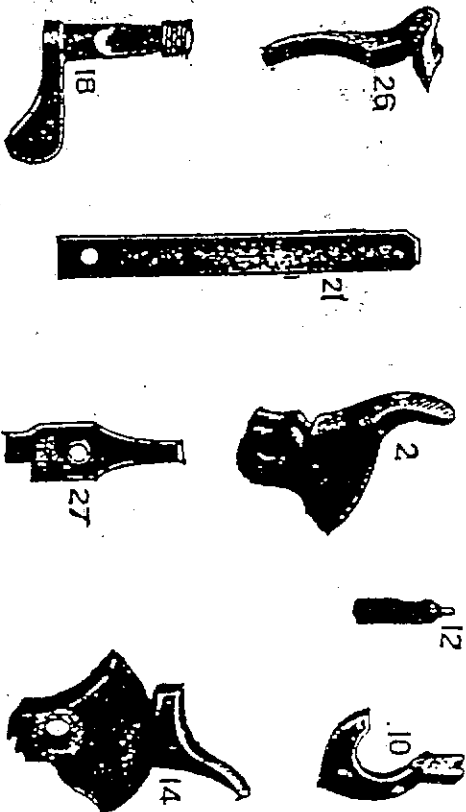

#### NO. 6 RIFLE

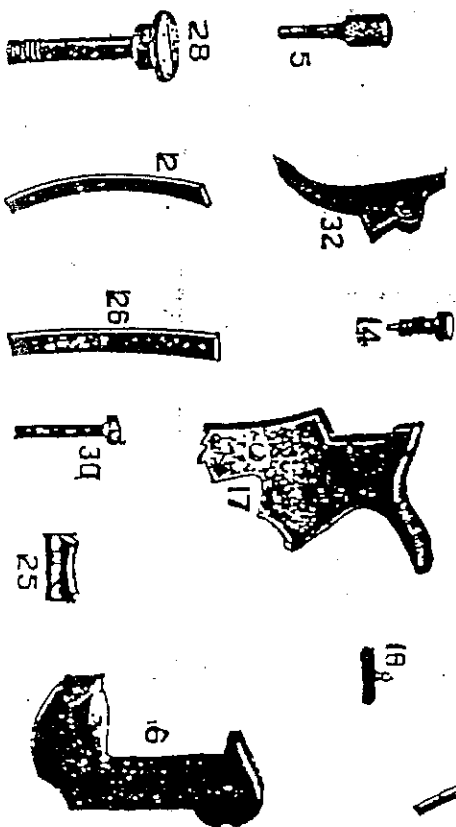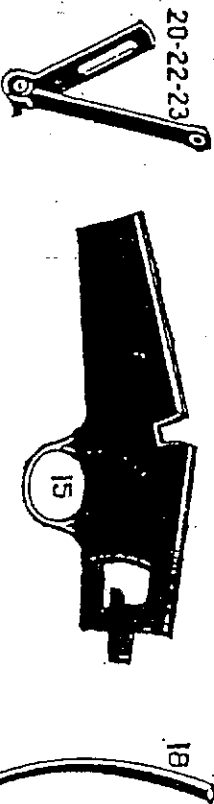

# Remington

## Single Shot Rifles

### Component Parts No. 4 Single Shot Rifle

NO.	PRICE	NO.	PRICE	NO.	PRICE
J 1 Barrel . . . . .	\$4.00	J 14 Hammer . . . . .	\$1.00	J 73 Rear Sight Screw	\$0.10
J 2 Breech Block . . . . .	1.00	J 15 Hammer Roll . . . . .	.10	J 70 Rear Sight Com- plete . . . . .	.30
J 3 Breech Block Screw . . . . .	.10	J 16 Hammer Roll Pin . . . . .	.10	J 23 Tang Screw . . . . .	.10
J 35 Butt Plate . . . . .	.40	J 17 Hammer Screw . . . . .	.10	J 24 Tip Stock . . . . .	1.00
J 36 Butt Plate Screw (2), each . . . . .	.10	J 18 Locking Lever . . . . .	.40	J 25 Tip Stock Screw . . . . .	.10
J 6 Butt Stock . . . . .	2.00	J 19 Locking Lever Stop Pin . . . . .	.10	J 26 Trigger . . . . .	.50
J 8 Escutcheon Head . . . . .	.10	J 20 Locking Pin . . . . .	.10	J 27 Trigger Block & Extractor Spring . . . . .	.25
J 9 Escutcheon Nut . . . . .	.10	J 21 Main Spring . . . . .	.40	J 28 Trigger Pin . . . . .	.10
J 10 Extractor . . . . .	.75	J 22 Main Spring Screw . . . . .	.10	J 29 Trigger Spring Screw . . . . .	.10
J 11 Extractor Pin . . . . .	.10	J 70 Rear Sight Leaf . . . . .	.40	J 30 Wiping Rod . . . . .	.15
J 12 Firing Pin . . . . .	.20	J 71 Rear Sight Base . . . . .	.20		
J 13 Frame . . . . .	3.50	J 72 Rear Sight Ele- vating Screw . . . . .	.10		
J 60 Front Sight . . . . .	.25				

*Ordered July 22 - 1902*

### Component Parts No. 6 Single Shot Rifle

NO.	PRICE	NO.	PRICE	NO.	PRICE
S 1 Barrel . . . . .	\$3.00	S 12 Extractor . . . . .	\$0.30	S 20 Peep Sight Base	\$0.20
S 6 Breech Block . . . . .	.40	S 34 Extr. Pin . . . . .	.10	S 21 Peep Sight Base Screw . . . . .	.10
S 2 Breech Block Spring . . . . .	.20	S 14 Firing Pin . . . . .	.20	S 22 Peep Sight Leaf . . . . .	.20
S 3 Breech Block Spring Screw . . . . .	.10	S 15 Frame Complete . . . . .	2.00	S 25 Rear Sight . . . . .	.25
S 5 Breech Block Thumb Piece . . . . .	.20	S 16 Front Sight . . . . .	.25	S 28 Take Down Screw . . . . .	.20
S 8 Butt Plate . . . . .	.40	S 17 Hammer . . . . .	.50	S 29 Tip Escutcheon . . . . .	.10
S 9 Butt Plate Screw (2), each . . . . .	.10	S 7 Hammer & Block Pin (2), each . . . . .	.10	S 31 Tip Stock . . . . .	.75
S 10 Butt Stock . . . . .	1.50	S 18 Main Spring . . . . .	.40	S 30 Tip Stock Screw . . . . .	.10
S 27 Butt Stock Bolt . . . . .	.10	S 19 Main Spring Screw . . . . .	.10	S 32 Trigger . . . . .	.20
S 11 Butt Stock Bolt Washer . . . . .	.10	S 38 Peep Sight As- sembled . . . . .	.50	S 37 Trigger Pin . . . . .	.10
				S 36 Trigger Spring . . . . .	.20
				S 33 Wiping Rod . . . . .	.15


ORDER PARTS BY CATALOGUE NAME AND NUMBER  
SPECIFY CALIBER AND SERIAL NUMBER OF RIFLE



### Model 4 Component Parts Listing

J1	Barrel	J20	Locking Pin
J2	Breech Block	J21	Main Spring
J3	Breech Block Screw	J22	Main Spring Screw
J35	Butt Plate	J70	Rear Sight Leaf
J36	Butt Plate Screw	J71	Rear Sight Base
J6	Butt Stock	J72	Rear Sight Elevating Screw
J8	Escutcheon Head	J73	Rear Sight Screw
J9	Escutcheon Nut	J70 ½	Rear Sight Complete
J10	Extractor	J23	Tang Screw
J11	Extractor Pin	J24	Tip Stock
J12	Firing Pin	J25	Tip Stock Screw
J13	Frame	J26	Trigger
J69	Front Sight	J27	Trigger, Block & Extractor
J14	Hammer	J28	Trigger Pin
J15	Hammer Roll	J29	Trigger Spring Screw
J16	Hammer Roll Pin	J30	Wiping Rod
J17	Hammer Screw		
J18	Locking Lever		
J19	Locking Lever Stop Pin		

### NO 4 RIFLE

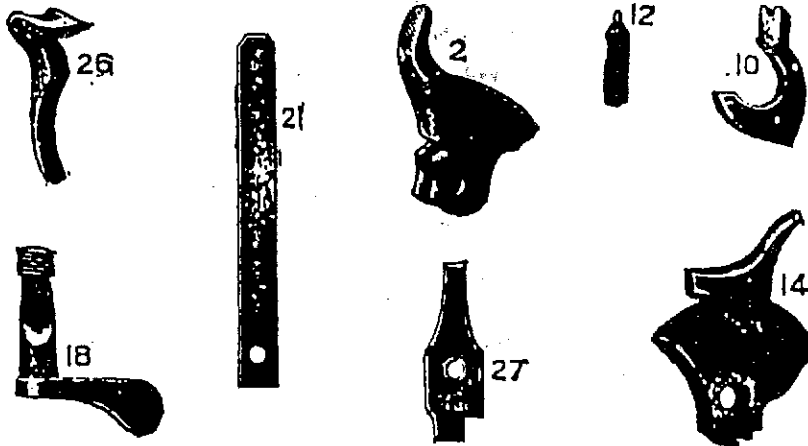

## Firearms Value & Reference Books

**NOTE:** We do not provide information on firearms' values. You may want to have your firearm appraised by a gunsmith. The following sources may also be helpful. We do not accept responsibility for the goods or services provided by these sources.

### Firearms Value Books

#### Blue Book of Gun Values

Blue Book Publications  
8009 34<sup>th</sup> Avenue South #175  
Minneapolis, MN 55425  
800-877-GUNS

#### Flayderman's Guide to Firearm Values

Gun List  
Modern Gun Values  
Krause Publications  
700 East State Street  
Iola, WI 54990-0001  
847-573-8530

#### Gun Trader's Guide

Stoeger Publishing Company  
5 Mansard Court  
Wayne, NJ 07470  
973-872-9500

### Reference Books

#### The Remington 700

John Flacy  
Brownells, Inc.  
200 South Front Street  
Montezuma, IA 50171  
515-623-5401

#### Cartridges of the World

Frank C. Barnes  
Standard Catalog of Firearms  
Krause Publications  
700 East State Street  
Iola, WI 54990-0001  
847-573-8530

#### Shooter's Bible

Stoeger Publishing Company  
5 Mansard Court  
Wayne, NJ 07470  
973-872-9500

#### Remington, America's Oldest

Gunmanker  
Remington Arms Co.  
PO Box 700  
Madison, NC 27025  
Attention: History Book  
800-423-8495